

AIRFLOW

CORES

Two modular (two section) aluminum HRV cores arranged for high efficiency cross-flow ventilation.

MOTORS

Two PSC, 5 speed double shafted, 120 VAC, 3.15 A motors. (6.3 A total on high speed) with 1/10 hp at 1625 RPM. Total of 610 watts on High speed. MCA: 7.9 MOP:10

BLOWERS

Centrifugal-type rated at 530 cfm (250 L/s) free air delivery. Each air stream has two centrifugal blowers driven by two PSC motors.

FILTERS

Washable air filters in exhaust and supply air streams.

DEFROST

Supply bypass damper routes indoor air to defrost cores.

WEIGHT 160 lbs. (70 kg) **SHIPPING WEIGHT** 240 lbs. (110 kg)

CONNECTION DUCT SIZES

Four 14"x 8" (356 mm x 200 mm)

MOUNTING

Unit to be set on support brackets hung by threaded rod-type apparatus (brackets and rods not included).

CASE

Twenty gauge pre-painted galvanized steel (G60) for superior corrosion resistance. Insulated with foil faced insulation duct liner where required to prevent exterior condensation. One drain connection 1/2" (12 mm) OD.

ELECTRONICS

Integrated microprocessor circuit board. Built-in interlock contacts.

CONTROL OPTIONS

99-GDXPL02 Airflow Digital Control (included)

- 5 speed operation on each mode
- Humidity control through adjustable Dehumidistat
- 5 user selectable operational modes: Continuous Ventilation, Continuous Recirculation, 20 ON/40 OFF, 10 ON/50 OFF, 20 ON/40 Recirculation
- 20/40/60 min. High speed override button
- Compatible with 99-DET02 Wireless Timers
- 3 wire connection

99-GBC02 Airflow Ventilation Control

- 2 speed fan setting (Low/High)
- Humidity control through adjustable Dehumidistat
- Compatible with 99-DET02 Wireless Timers
- 3 wire connection

99-GBC03 Airflow Ventilation Control

- Continuous Low fan speed
- Humidity control through adjustable Dehumidistat
- 3 modes of operation: Ventilation, Recirculation, 20/40
- Compatible with 99-DET02 Wireless Timers
- 3 wire connection

99-GBC04 Airflow Ventilation Control

- 2 speed fan setting (Low/High)
- 2 modes of operation: Ventilation, 20/40
- Compatible with 99-DET02 Wireless Timers
- 3 wire connection

99-GDH01 Airflow Dehumidistat

- Humidity control through adjustable Dehumidistat
- 3 wire connection

TIMER OPTIONS


99-DET01 Airflow 20/40/60 Minute Timer - Initiates High speed Ventilation for 20, 40 or 60 minutes. 3 wire connection.

99-DET02 Airflow IRELESS 20/40/60 Minute Timer - Initiates High speed Ventilation for 20, 40 or 60 minutes.

Wirelessly connects to main control for ease of installation. 40' approximate range.

99-RX02 Airflow WIRELESS Repeater - Used to extend range of 99-DET02 Wireless Timers. Plugs into 120V power outlet. Wirelessly connects to main control and 99-DET02. Install at halfway point between timer and main wall control if timer is out of range.

DIMENSIONS inches (mm)

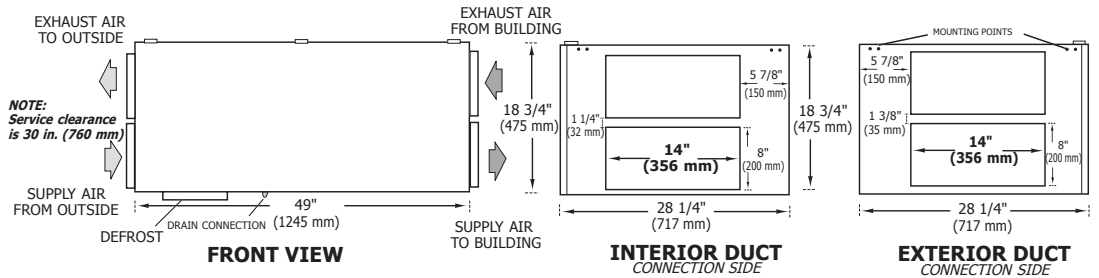


WARRANTY

Units carry a 15 year warranty on the HRV core and a 2 year replacement parts warranty.

PERFORMANCE

Net supply airflow in cfm (L/s) against external static pressure

E.S.P	cfm	L/s
@ 0.1" (25 Pa)	450	(212)
@ 0.2" (50 Pa)	426	(201)
@ 0.3" (75 Pa)	400	(189)
@ 0.4" (100 Pa)	371	(175)
@ 0.5" (125 Pa)	337	(159)
@ 0.6" (150 Pa)	304	(143)
@ 0.7" (175 Pa)	269	(127)
@ 0.8" (200 Pa)	158	(75)
@ 0.9" (225 Pa)	107	(50)
VAC @ 60HZ	120	
WATTS / Low speed	187	
WATTS / High speed	610	
Amp rating	6.3	

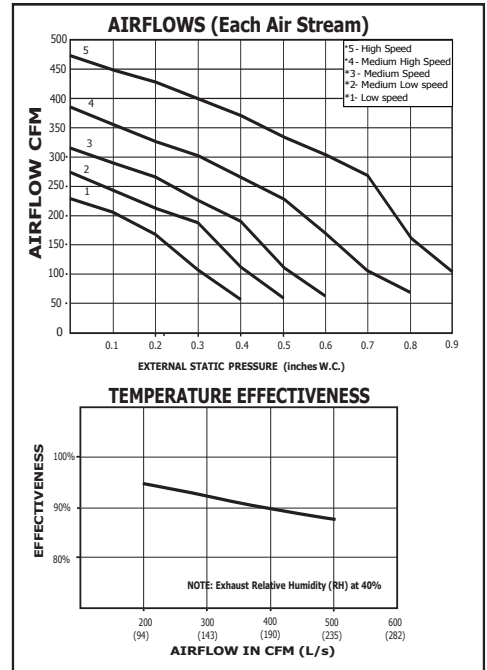

All units conform to CSA and UL standards

NOTE: All specifications are subject to change without notice.

Date: _____

Tag: _____ Qty: _____

Project: _____

Engineer: _____

Contractor: _____

Supplier: _____

Quote#: _____

Submitted by: _____